

# 5700

## SIL3 HART® Mux Modem for Termination Board

The HART® Multiplexer Modem interfaces up to 256 smart devices (transmitters, I/P, proportional valves, etc...) in a HART® Network. Each device can be fully identified, configured and monitored either by a remote PC running an FDT-based software package (PACTware™, etc...) through a dedicated Device Type Manager (DTM), by HART® OPC Server, or by a specific asset management system. Up to 63 Multiplexer Modem (16128 loops) can be connected in multi-drop mode to the PC through the RS485 HART® Protocol, whose baudrate can be configured via software. The module is intended to be mounted on the following Term. Boards:

- TB(E)-D5001-HRT-003: to be used with GMI AI/AO Term. Boards;
- TB(E)-D5001-HRT-004: to be used with DIN-Rail mounted barriers/isolators or direct field connections, 4-20 mA loop signals, AI card impedance = 250 Ω;
- TB(E)-D5001-HRT-005: to be used with DIN-Rail mounted barriers/isolators or direct field connections, 1-5 V loop signals;
- TB(E)-D5001-HRT-006: to be used with DIN-Rail mounted barriers/isolators or direct field connections, 4-20 mA loop signals, AI card impedance = 100+150 Ω;
- TB(E)-D5001-HRT-007: to be used with DIN-Rail mounted barriers/isolators or direct field connections, 4-20 mA loop signals, AI card impedance = 0+50 Ω.


Termination board types can be combined to manage different interfaces at the same time, provided the maximum number of channels is not exceeded.

The HART® Multiplexer Modem is SIL 3 certified as non-interfering with the signal loops.

### FEATURES

- SIL 3 / SC 3
- Installation in Zone 2/Div. 2
- Up to 256 channels (extendable to 16128 with 63 multi-drop units)
- HART® RS-485 interface to access field smart devices
- Three port isolation, Field Interface/Serial Interface/Supply
- Simplified installation on custom Termination Boards

### OVERALL DIMENSIONS

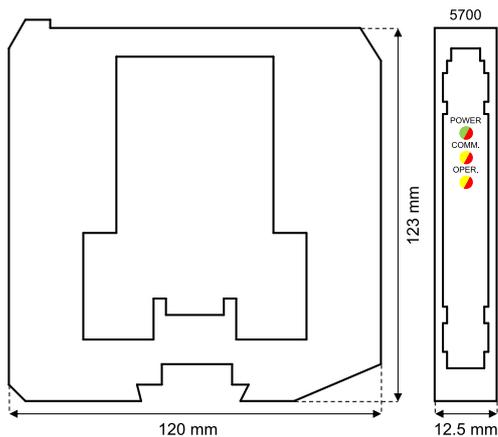

### TECHNICAL DATA

#### Supply

24 Vdc nom (18 to 30 Vdc) reverse polarity protected, provided through Termination Board.

**Current consumption:** 20 mA @ 24 Vdc typical (modem only), 40 mA @ 24 Vdc in full topology (with maximum number of extension boards), typical.

**Power dissipation:** 0.5 W @ 24 Vdc typical (modem only), 1 W @ 24 Vdc in full topology (with maximum number of extension boards), typical.

#### Field Interface

**Number of channels:** 256.

**HART® field device revision:** 5 to 7.

#### Write Protection

The HART® Multiplexer Modem 5700 can be protected against writing by shorting terminals 7 and 8.

#### Serial Interface

**Type:** RS-485 differential pair and grounding.

**Topology:** multi-drop, master/slave connection.

**Address:** 0 - 62, software configurable.

**Baudrate:** from 1200 to 115200 bps, software configurable.

#### Isolation

Field Interface/Serial Interface 500 V; Field Interface/Supply 500 V;

Supply/Serial Interface 500 V.

#### Environmental conditions

**Operating temperature:** temperature limits -40 to +70 °C.

**Max altitude:** 2000 m a.s.l.

**Storage temperature:** temperature limits -45 to +80 °C.

#### Mounting

on custom Term. Board.

**Weight:** about 100 g.

**Location:** installation in Safe Area or Zone 2, Group IIC T4, or Class 1, Div. 2, Group A, B, C, D, T4.

**Connection:** Width 235 mm, Depth 135 mm, Height 154 mm.

**Dimensions:** Width 12.5 mm, Depth 123 mm, Height 120 mm.

### ORDERING INFORMATION

#### Ordering codes

5700: supports PACTware™, HART® OPC Server, ABB Ability™, Endress+Hauser FieldCare™, etc., any software FDT/DTM compliant 5700-110: supports Emerson AMS™

#### Accessories


Programmable USB serial line Kit PPC5092 + SWC5090.



## FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

**Field**

**Safe Area/Zone 2/Div. 2**

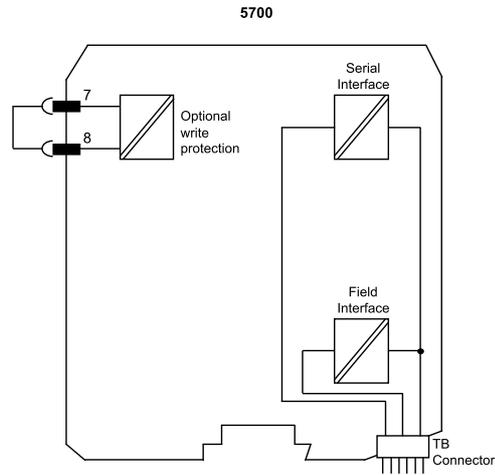

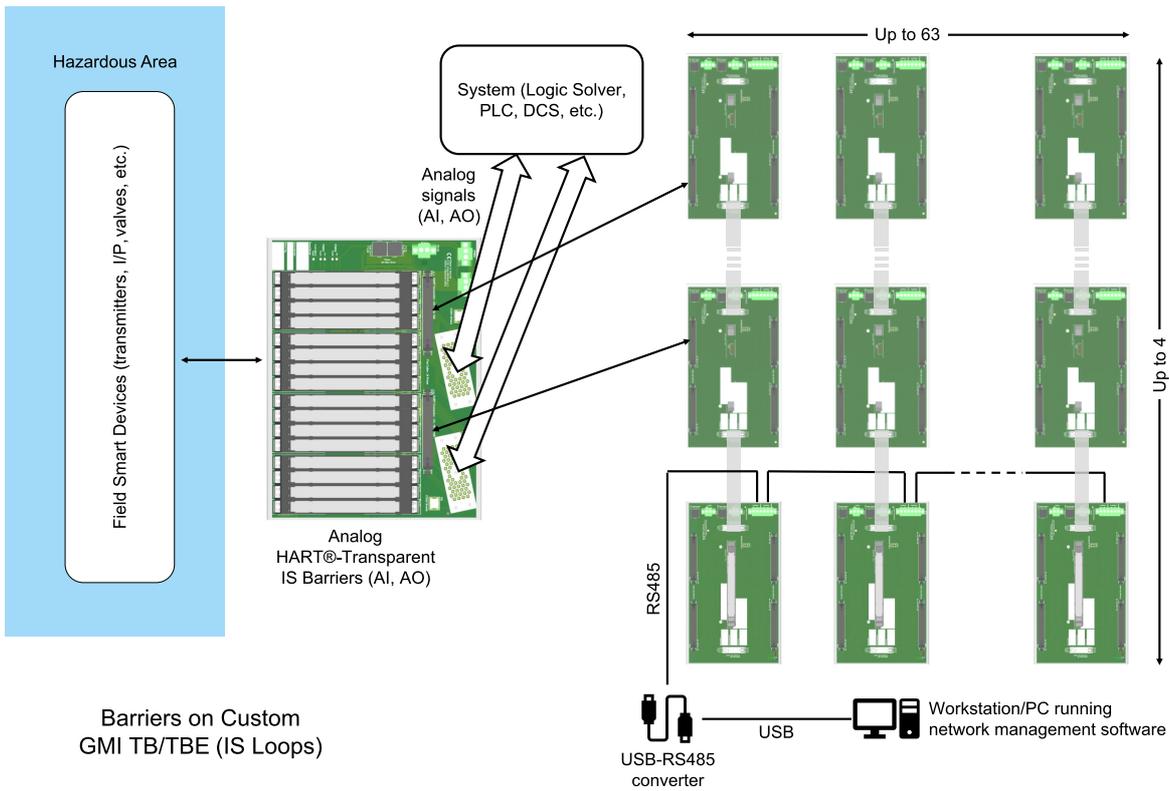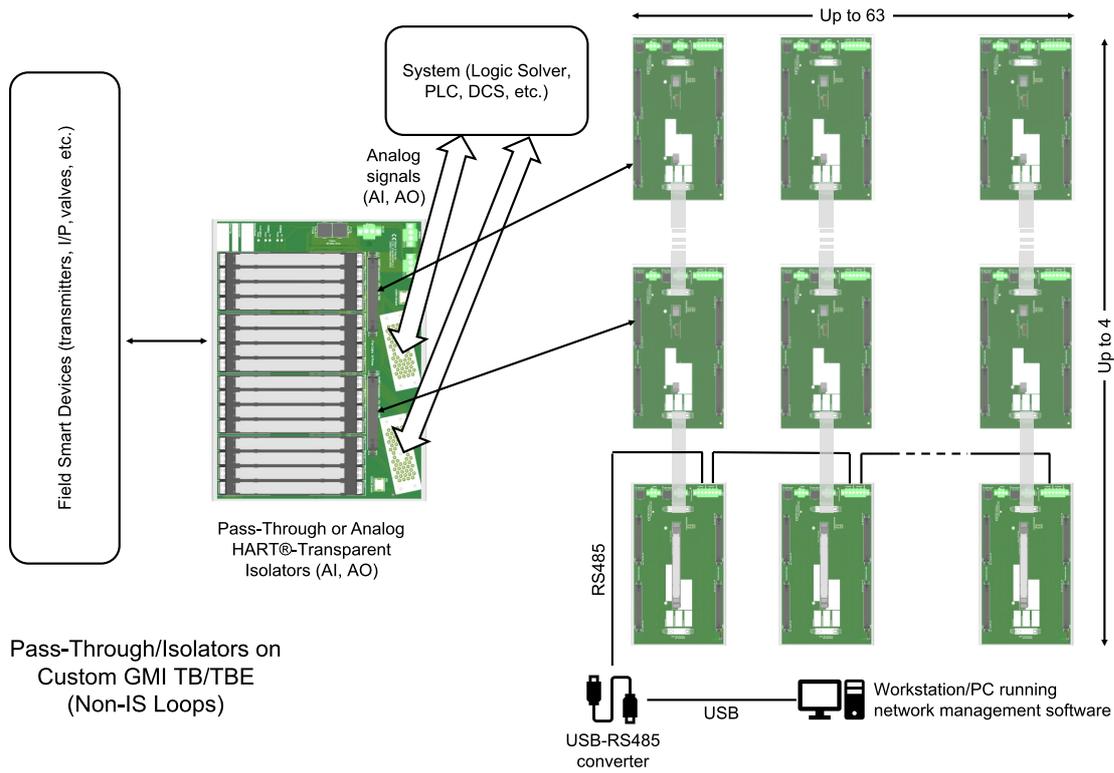

# HART MUX + BARRIERS/ISOLATORS NETWORK

