

D6039

SIL2 Line-Fault Transp. Switch/Prox. Repeater

The Switch/Proximity Detector Repeater D6039 is a module suitable for applications requiring SIL 2 level in safety related systems for high risk industries. The unit can be configured for switches or proximity detectors and repeats the input state to the output. The output port can assume two different impedance values (RL or RH) or it can open completely. The module output repeats the input state according to the following correspondence: low input state -> RL, high input state -> RH. Alternatively, the output can be configured to invert the input state. In both cases, the output opens if any fault (open or short circuit) occurs at the corresponding input.

FEATURES

- SIL 2 / SC 3
- Field open and short circuit detection
- Field fault universal mirroring to PLC DI
- In-field programmability by DIP Switch
- Three port isolation, Input/Output/Supply
- High Density, two channels per unit

ORDERING INFORMATION

Ordering codes

D6039xy

x: S → 1 channel; D → 2 channels; X → duplicator


y: A → RL = 2.2 kΩ, RH = 14.3 kΩ; B → RL = 476 Ω, RH = 1.38 kΩ

C → RL = 5 kΩ, RH = 15 kΩ; D → RL = 0 Ω, RH = 33.2 kΩ

Accessories

Bus Connector JDFT049, Bus Mounting Kit OPT5096.

OVERALL DIMENSIONS

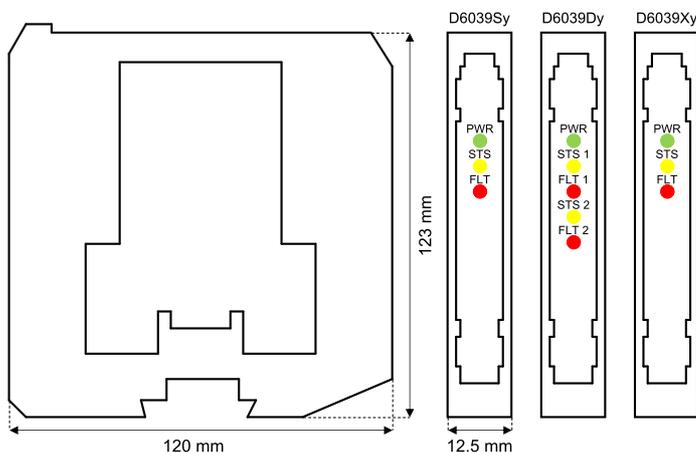

TECHNICAL DATA

Supply

24 Vdc nom (18 to 30 Vdc), reverse polarity protected.

Current consumption: 30 mA (D6039D), 25 mA (D6039X), 15 mA (D6039S), @ 24 Vdc, typical.

Power dissipation: 1.0 W (D6039D), 1.0 W (D6039X), 0.4 W (D6039S), @ 24 Vdc, typical.

Input

Input switching current levels: ON ≥ 2.1 mA, OFF ≤ 1.2 mA.

Open fault: current ≤ 0.05 mA.

Short fault: resistance ≤ 100 Ω.

No fault: current ≥ 0.35 mA and resistance ≥ 360 Ω.

Input equivalent source: 8 V 1 kΩ typical (8 V no load, 8 mA short).

Output

Voltage free SPST solid-state relays, with series (RL) and parallel (RH-RL) resistances, ±5% tolerance.

Fault impedance: > 1 MΩ.

Max voltage: 30 Vdc.

Response time: 500 μs.

Frequency response: 1 kHz maximum.

Isolation

In/Out 1.5 kV; In/Supply 1.5 kV; In/In 500 V; Out/Supply 500 V; Out/Out 500 V.

Environmental conditions

Operating temperature: temperature limits -40 to +70 °C.

Storage temperature: temperature limits -45 to +80 °C.

Mounting

DIN-Rail 35 mm, with or without Power Bus or on custom Term. Board.

Weight: about 135 g (D6039D and D6039X), 120 g (D6039S).

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm² (13 AWG).







Dimensions: Width 12.5 mm, Depth 123 mm, Height 120 mm.

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

Field

Safe Area

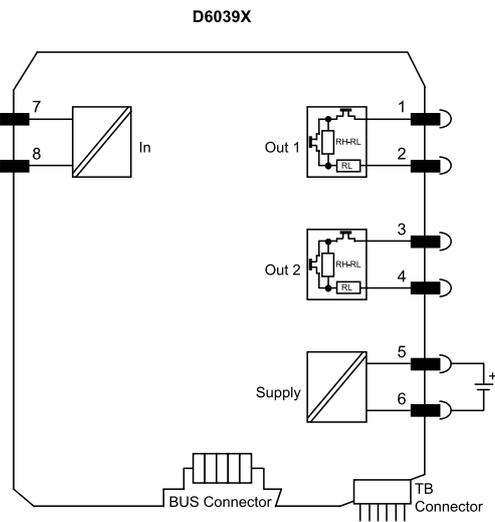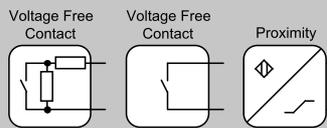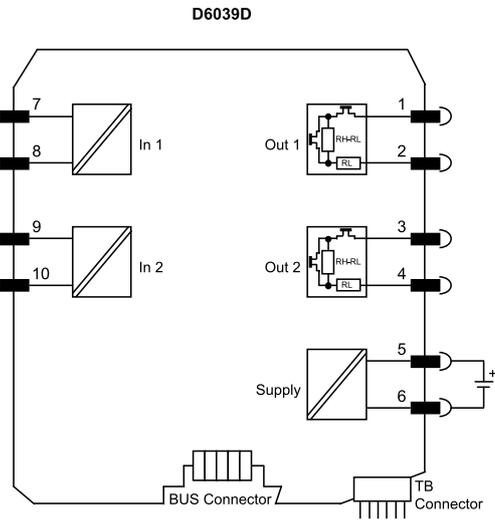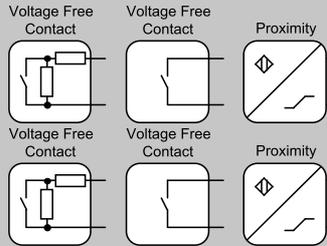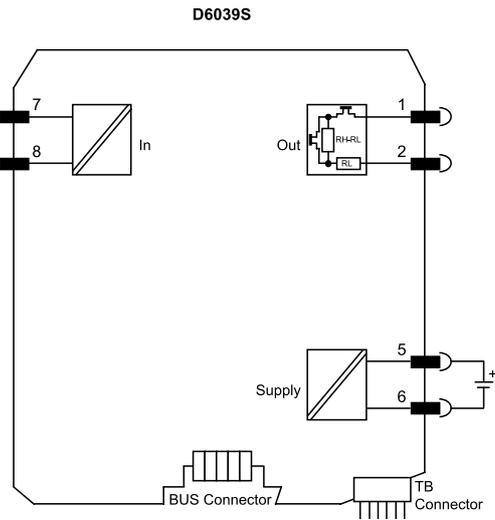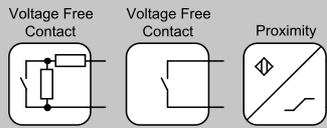

Functional Safety Management Certification: GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to instruction manual.