

D6011

SIL3 2-Wire HART® Transmitter Power Supply

The Repeater Power Supply D6011 module is a high integrity analog input interface suitable for applications requiring SIL 3 level in safety related systems for high risk industries. It provides a fully floating dc supply for energizing conventional 2 wires 4-20 mA transmitters, and repeats the current in floating circuit to drive a load. The circuit allows bi-directional communication signals, for HART® devices.

FEATURES

- SIL 3 / SC 3
- 4-20 mA Passive Input, Source Output
- HART® compatible
- Input and Output short circuit proof
- High Accuracy
- Three port isolation, Input/Output/Supply
- High Density, two channels per unit

ORDERING INFORMATION


Ordering codes

D6011S: 1 channel
D6011D: 2 channels

Accessories

Bus Connector JDFT049, Bus Mounting Kit OPT5096.

OVERALL DIMENSIONS

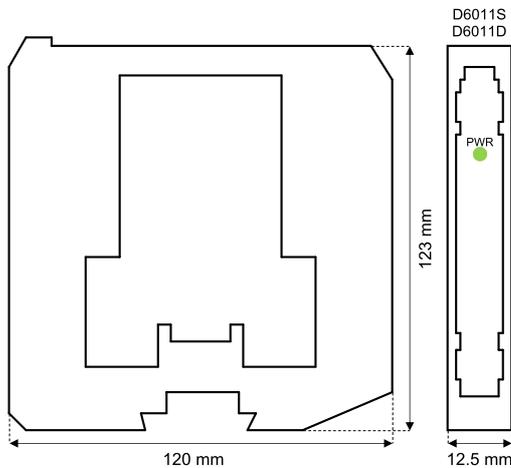

TECHNICAL DATA

Supply

24 Vdc nom (18 to 30 Vdc), reverse polarity protected.

Current consumption: 90 mA (D6011D), 45 mA (D6011S), @ 24 Vdc with 20 mA output, typical.

Power dissipation: 1.35 W (D6011D), 0.675 W (D6011S), @ 24 Vdc with 20 mA output, typical.

Input

4 to 20 mA (2 wires Tx current limited \approx 25 mA), reading range 0 to 24 mA.

Transmitter line voltage: 15.0 V typical, 14.5 V minimum, @ 20 mA.

Output

4 to 20 mA, on max. 550 Ω load in source mode (typical 12 V compliance).

Response time: 5 ms (0 to 100 % step change).

Performance

Ref. Conditions: 24 V supply, 250 Ω load, 23 \pm 1 $^{\circ}$ C ambient temperature.

Calibration accuracy: $\leq \pm 0.1$ % FSR.

Linearity accuracy: $\leq \pm 0.05$ % FSR.

Temp. influence: $\leq \pm 0.01$ % FSR on zero/span for a 1 $^{\circ}$ C change.

Isolation

In/Out 2.5 kV; In/Supply 2.5 kV; In/In 500 V; Out/Supply 500 V; Out/Out 500 V.

Environmental conditions

Operating temperature: temperature limits -40 to $+70$ $^{\circ}$ C.

Storage temperature: temperature limits -45 to $+80$ $^{\circ}$ C.

Mounting

DIN-Rail 35 mm, with or without Power Bus or on custom Term. Board.

Weight: about 140 g (D6011D), 125 g (D6011S).

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm² (13 AWG).

Dimensions: Width 12.5 mm, Depth 123 mm, Height 120 mm.


FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.


Field

Safe Area

D6011S

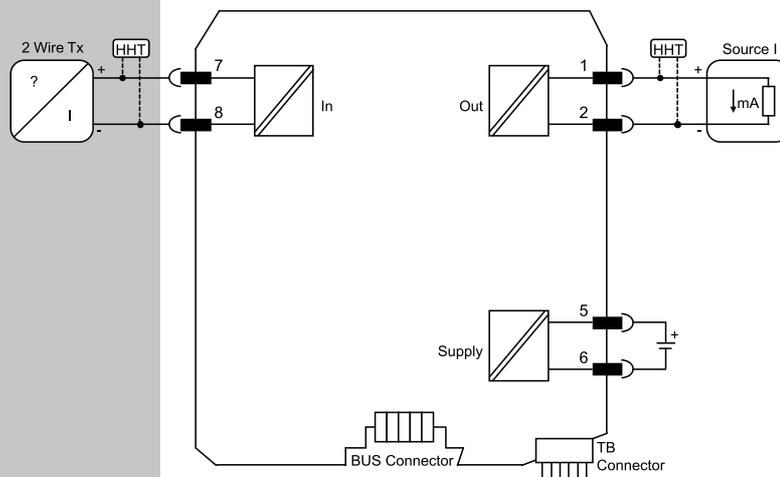

D6011D

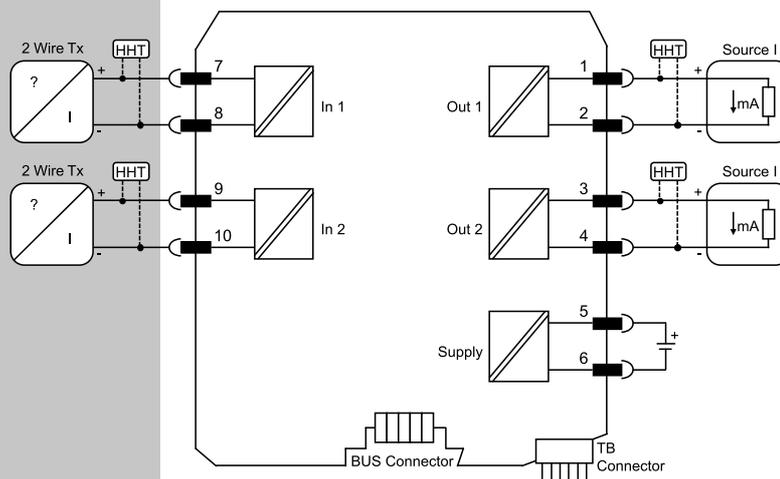

Functional Safety Management Certification: GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to instruction manual.