

# D6062

## SIL2 Vibration Transducer Interface

The Vibration Transducer Interface D6062S is a high integrity analog input interface suitable for applications requiring SIL 2 level in safety related systems for high risk industries. It provides a fully floating dc supply for energizing vibration transducers, accelerometers or 2-3 wires sensors, and repeats the sensor input voltage in a totally isolated circuit to drive vibration monitors or analyzers for rotating machinery control and supervision purposes.

### FEATURES

- SIL 2 / SC 3
- 0 to -20 V Input/Output Signal
- Wide band signal transfer
- Input and Output short circuit proof
- In-field programmability by DIP Switch
- High Accuracy
- Three port isolation, Input/Output/Supply

### ORDERING INFORMATION


#### Ordering codes

D6062S: 1 channel

#### Accessories

Bus Connector JDFT049, Bus Mounting Kit OPT5096.

### OVERALL DIMENSIONS

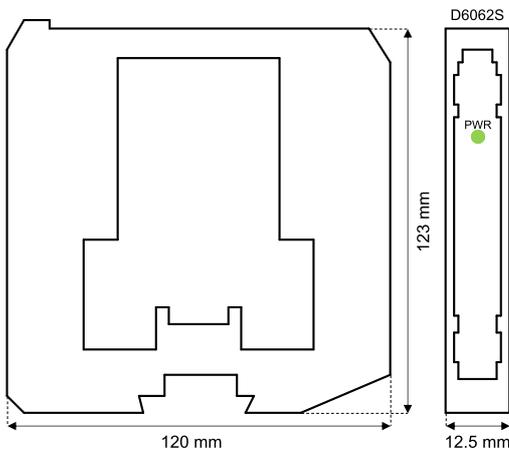

### TECHNICAL DATA

#### Supply

24 Vdc nom (18 to 30 Vdc), reverse polarity protected.

**Current consumption:** 90 mA @ 24 Vdc with 20 mA transducer consumption and 2 mA output load, typical.

**Power dissipation:** 2.0 W @ 24 Vdc with 20 mA transducer consumption and 2 mA output load, typical.

#### Input

0 V to -20 V (10 kΩ impedance at terminals 7-8 or 8-9).

**3 wires sensor supply voltage:** more than -22 V @ 0 mA supply, more than -17 V @ 15 mA supply (current limited @ ≈ 23 mA).

**2 wires sensor supply voltage:** more than -17 V with constant current supply.

**2 wires sensor supply current:** selectable @ 4 mA, 6 mA or 10 mA via internal DIP-Switch.

#### Output

0 to -20 V on 10 kΩ load, with 10 Ω output resistance.

**Response time:** ≤ 10 μs (10 to 90 % step change).

**Frequency response:** DC to 20 kHz within 1 dB maximum.

#### Performance

**Ref. Conditions:** 24 V supply, 10 kΩ load, 23 ± 1 °C ambient temperature.

**Calibration accuracy:** ≤ ± 0.1 % FSR.

**Linearity accuracy:** ≤ ± 0.05 % FSR.

**Temp. influence:** ≤ ± 0.005 % on zero/span for a 1 °C change.

#### Isolation

In/Out 1.5 kV; In/Supply 1.5 kV; Out/Supply 500 V.

#### Environmental conditions

**Operating temperature:** temperature limits -40 to +70 °C.

**Storage temperature:** temperature limits -45 to +80 °C.

#### Mounting

DIN-Rail 35 mm, with or without Power Bus or on custom Term. Board.


**Weight:** about 125 g.

**Connection:** by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm<sup>2</sup> (13 AWG).

**Dimensions:** Width 12.5 mm, Depth 123 mm, Height 120 mm.

## FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

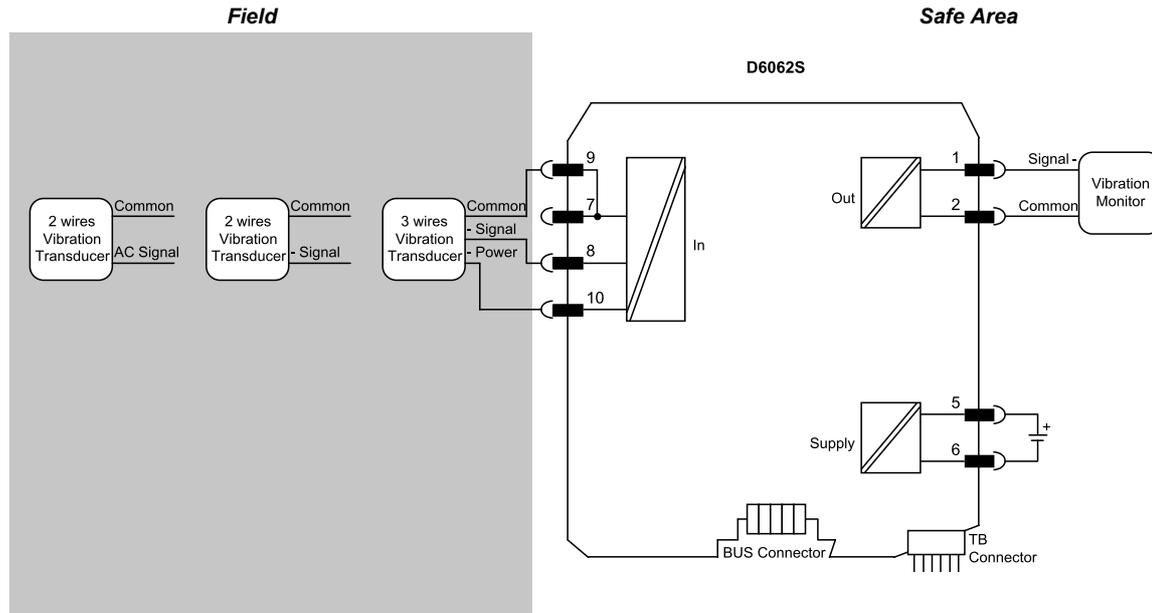

Functional Safety Management Certification:  
GM International is certified to conform to IEC61508:2010 part 1 clauses 5-6 for safety related systems up to and included SIL3. In addition, GM International products have been granted I.S. certificates from the most credited Notified Bodies in the world.

Data specified in this document are merely descriptive of the products and should be integrated with relevant technical specifications. Our products are in constant development and the information presented herein refers to the time of document issue. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. Terms & Conditions can be found at our website. For more information refer to instruction manual.